

HarlequinTM Freestyle

Harlequin Freestyle is a cushioned vinyl performance floor with a slip-resistant dance surface, a vinyl support layer and closed-cell foam backing, this provides added protection against hard subfloors.

Installation: Harlequin Freestyle is specified for permanent or temporary installation, the joins are welded or taped to form a continuous performance surface that can be laid onto any hard or smooth subfloor and is recommended for use in conjunction with a suitable Harlequin sprung floor.


Usage: Harlequin Freestyle was developed for dance styles such as hip-hop, jazz and street dance (break dance). It is widely used for all contemporary and modern dance, aerobics and Zumba.

Specification Guide



Material	Heterogeneous vinyl
Permanent or Portable	Both
Roll Lengths	15m, 20m, 25m, 30m
Roll Width	1.5m
Thickness	4.5mm
Weight	2.67kg/m ²
Finish	Embossed
Fire Rating	Cfl-s1 (EN 13501-1)
Warranty	10 years if installed by Harlequin 5 years if installed by the customer
Fixing Type	Adhesive or Taped
Seams	Welded or Taped
Light Reflectance	180-2, 880-39
Gloss Level	Nominal 6
Lightfastness	≥6
Recycled Content	23-30%
VOC Emissions	≤0.5mg/m ³
Recyclability	100%
Underfloor Heating	Suitable for use with underfloor heating
Third Party Certification	Environmental Product Declaration A+ LEED, BREEAM, REACH Compliant

Available Colours:

Black - 180

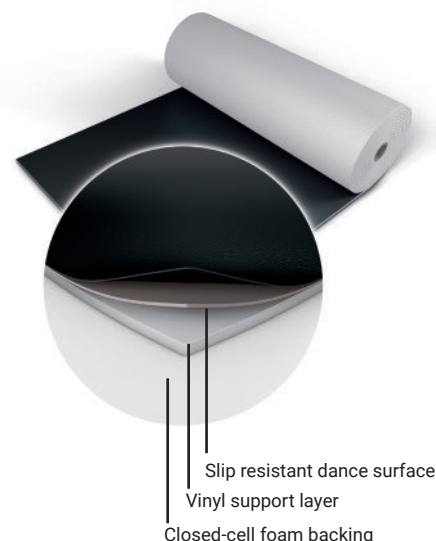

Grey - 880



If you would like further information or advice please contact us on
+352 46 44 22 or info@harlequinfloors.com

Made in the EU. The Company reserves the right to make any variation in design or construction of the material described. Harlequin® is a registered trademark of Harlequin Europe SA. © Harlequin Floors 09/2023

LONDON ♦ LUXEMBOURG ♦ BERLIN ♦ MADRID ♦ PARIS ♦ LIEGE ♦ PHILADELPHIA ♦ LOS ANGELES ♦ FORT WORTH ♦ SYDNEY ♦ HONG KONG ♦ TOKYO



HARLEQUIN
www.harlequinfloors.com